


FabStop FB

FIRE BATT SYSTEM

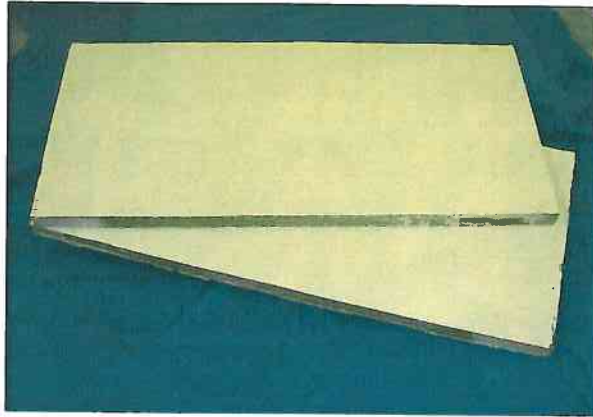

FabStop FB Batt System has been developed to create a barrier preventing the passage of fire and smoke between fire rated compartments. It is designed to allow the installation of services with ease, giving up to 4-hour rating to prEN1366 pt 3. The FabStop FB Batt has a 1200 x 600 x 50mm 160kg/m³ mineral fibre core coated with the FabStop water based acrylic sealant on both sides, providing excellent fire and electrometric properties. At normal temperatures, the FabStop FB Batt System remains flexible to permit thermal and mechanical movement of the services. The System is unaffected by oil, fungus, moisture, vermin, weather and contains no halogens or asbestos.

The advantages of the FabStop FB Batt System are as follows:

- Suitable for indoor and outdoor use without additional environmental protection.
- Coat back of services is not required.
- Remains flexible between -10 to +95°C.
- Easy to use fibre free sealant.
- Standard 50mm thickness gives 4 hours fire and smoke barrier and 2 hours insulation.
- Long life and ease of installation.
- Suitable for large openings in walls and floors with additional supports.
- Tested to BS476 Part 20

FPCL

Fire Protection Coatings Limited

1-3 Highway Point, 239 Torrington Avenue, Coventry, CV4 9AP

Tel: +44 (0)24 7642 2200 Fax: +44(0)24 7646 5568

Email: Fpcltd@btconnect.com

Website: www.fireprotectiondevelopments.com

www.fireprotectioncoatings.com

SPECIFICATION

Dimensions	FS/160 – 1200mm x 600mm x 50mm
Density	160Kg/m³ - 180Kg/m³
Coating Thickness	1mm Nominal DFT
Fire Resistance	4 hours – BS476 pt 20 / BSEN1366 pt 3
Insulation (Single Board)	142 minutes on seal face 29 minutes on services
Insulation (Double Boards)	264 minutes on seal face 69 minutes on services
Acoustic Performance	23db reduction with 1 50mm FabStop FB Batt 29db reduction with 2 50mm FabStop FB Batts
Mechanical Support Required	30mm x 30mm x 1.6mm steel angle



To be read in conjunction with Application Instruction Sheet and Material Safety Data Sheet.

FPCL

Fire Protection Coatings Limited

1-3 Highway Point 239 Torrington Avenue, Coventry, CV4 9AP

Tel: +44 (0)24 7642 2200 Fax: +44(0)24 7646 5568

Email: Fpcltd@btconnect.com

Website: www.fireprotectiondevelopments.com

www.fireprotectioncoatings.com